

## MORSØ 1400 SERIES

The Morsø 1400 series is a small, powerful, cleanburning non catalytic stove, that is the perfect heat source for areas up to 800 sq. feet. The Morsø 1410 is a radiant stove with standard stove legs. The Morsø 1440 is a convection stove, where the legs are replaced with cast iron panels. These panels act as heat exchangers drawing cool air from the floor. This air is heated and flows naturally into the room and adjacent areas, giving off a more even temperature.

The appeal of cast iron lies not only in its ability to absorb heat from the fire and releasing it slowly into your home long after the fire is out, but also in the aesthetically pleasing forms with which it can be shaped. Morsø craftsmen produce the finest cast iron wood stoves in the world. The name Morsø has been synonymous with quality since April 1853. In 1915 Morsø received the honor of being appointed to the Royal Danish Court. This prestigious appointment means that the products produced are held to the highest standards of quality and that the companies themselves have demonstrated exceptional business practices and ethics.

Morsø exports to most countries in Europe, as well as Japan, Australia, South Africa, Canada and the United States.



Morsø 1440

**morsø**<sup>®</sup>

integrated design since 1853





Morso 1410

## 1400 SERIES SPECIFICATIONS

Height (1410) .....	27.6" (A)
Height (1440) .....	28.4" (A)
Width (1410) .....	15.4" (B)
Width (1440) .....	17.1" (B)
Depth (1410) .....	16.3" (C)
Depth (1440) .....	17.1" (C)
Flue Collar Height (1410) (Rear exit).....	23.4" (D)
Flue Collar Height (1440) (Rear exit).....	23.8" (D)
Measurement of stove	
rear to centerline of top flue collar .....	5" (E)
Flue Collar Height (1410) (Top exit) .....	28.9" (C/L) (F)
Flue Collar Height (1440) (Top exit) .....	29.7" (C/L) (F)
Flue Collar Size .....	6"
Btu's Max. ....	25,000
Burn Time.....	6 Hours
Avg. Area Heated .....	800 sq. ft.
Log Length .....	12"
EPA Grams per Hr. ....	3.3




## 1400 CLEARANCES

Single Wall Chimney Connector	1410	1440
Top Plate to Rear Wall:	16"	16"
Top Plate to Side Wall:	20"	8"
To Plate to Corner Wall:	14"	12"

### Shielded Single Wall or Double Wall Chimney Connector:

Top Plate to Rear Wall:	6"	6"
Top Plate to Side Wall:	20"	8"
To Plate to Corner Wall:	14"	7"

Clearance Above the Stove:	16"	16"
----------------------------	-----	-----

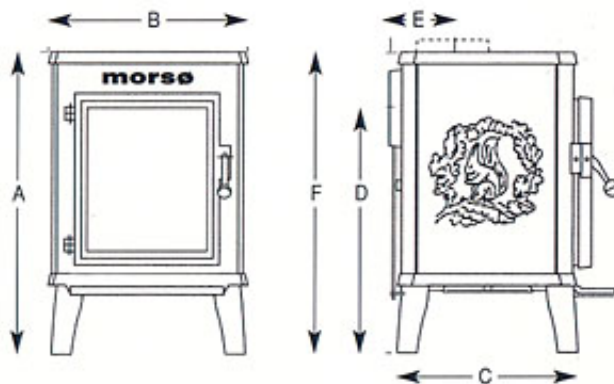

Please consult your local stove dealer for details on the full line of Morso products and accessories

**United Energy  
Heating & Cooling**  
[www.unitedenergy.ca](http://www.unitedenergy.ca)  
 416-503-3159

## MORSØ 1400 SERIES - FEATURES AND BENEFITS

- 148 years of cast iron experience means top quality castings that sets the industry standard
- Both rear and bottom heat shields for reduced clearances and better heat convection are standard
- Excellent clearances
- Reversible flue collar for either top or rear venting gives added installation flexibility
- Superior air wash system keeps the glass clean for unparalleled fire viewing
- Single air control for ease of operation
- Rugged ash pan made of heavy gauge steel
- Gasketed cast iron stove plates provide tight seals that require less maintenance through years of operation
- Chromium treated internal castings give added strength and durability
- 10 years limited warranty