


# Homeflame Highlight

Valor's experienced designers have combined timeless traditional styling with today's sophisticated technology to produce the world's most elegant gas fireplace heater. From the richly finished canopy to the superbly detailed logs and soft dancing flames, the Homeflame Highlight exudes quality and style (not to mention plenty of warm radiant and convected heat). For proven reliable performance, easy installation and honest value, choose the Highlight and join over one million satisfied Valor Homeflame customers.

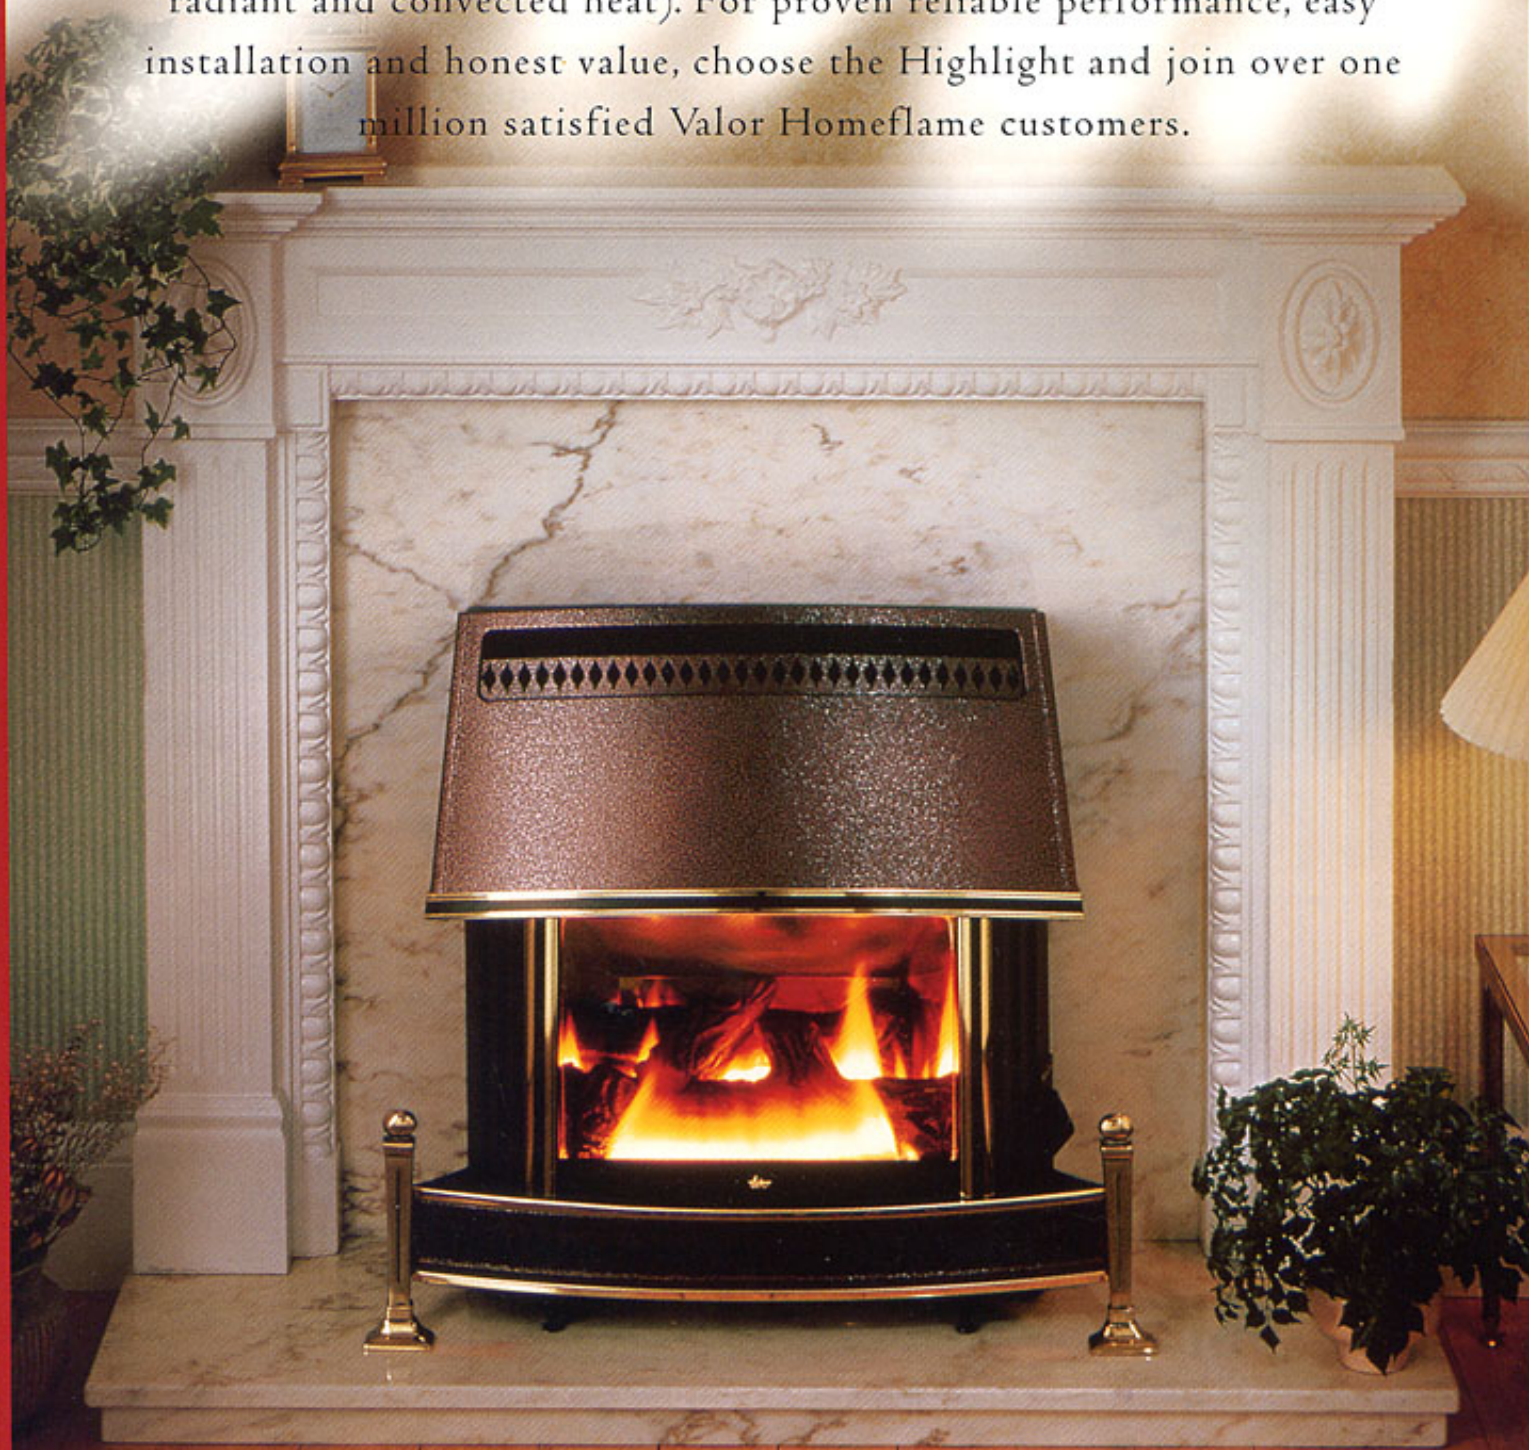

## Specifications

Model #	Fuel	Max Input BTU/Hr	Min Input BTU/Hr	Max Output BTU/Hr
492 CN (Natural Gas)	NG	20,000	7,700	15,000*
492 CP (Propane)	LPG	17,000	8,750	12,750*

\*Certified to CAN1-2.1 M86 ANSI Z21.11.1 1991


## Applications



Fireplace Retro-fit

### Fireplace Retrofit

Highlight can easily retrofit any masonry or zero clearance fireplace. Minimum fireplace opening is 19.5" h. from hearth surface to underside of opening. Optional brass trimmed closure plates shown, available in black or brown, may be used to close fireplace openings up to 29" h x 39" w (or 32" h by 36" w black only). Note: We recommend a chimney liner be used. Consult your dealer for details.

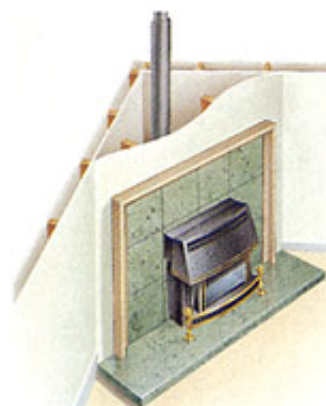

Flush-to-wall (zero clearance)

### Flush-to-wall

(zero clearance)  
Use optional #401 CVK Concealed Vent Kit to install Highlight with back flush to any wall finish to conceal B-vent chimney. May also be common vented with other gas appliances (check local codes).

### Free Standing (not shown)

Simply connect the Highlight to a suitable chimney and you have a perfect wood stove replacement. No options required.

## Features

- Slim design - less than 11" depth. Safely installs with low clearance requirements.
- Easy one-handed lighting - Highlight's integral piezo ignition system means no matches or power required.
- Over 800 sq. inch, triple heat exchange system and airflow casing designed for maximum convection and heat distribution. It's so effective a fan is not required.
- High radiant heat outburst is superior to fan forced systems for effective comfort control.
- Incredible Range: From 20,000 down to 7,700 BTU/hr input allows you to run your Highlight year round. The low fire setting provides cozy background heat for pennies an hour. The full fire satisfies most heating demands making the Highlight truly a heater for all seasons.
- Valorflame™ twin burner system gives unmatched flame and glow throughout the entire input range while consuming less gas than most other brands.

## Color Options




Charcoal Black  
(NG or LPG)

Cinnamon Brown  
(NG only)

## Construction

Firebox and Burners: Stainless Steel  
Secondary Heat Exchangers: Aluminized Steel  
Casing: Baked powder coat epoxy on steel  
Trim: Brass plate  
(solid brass andirons)  
Logs: Ceramic Fiber  
Glass: Ceramic  
Flue Collar: 4" Dia.

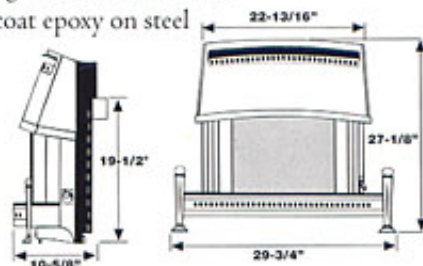

**Valor**

Warming Homes Since 1890

www.valorflame.com

\*As per CGA Standard CAN1-2.1 Copyright Miles Industries Ltd. 2000 Patents Pending Valor is registered to ISO9001, EN29001, BS5750 Part 1



**United Energy**

Heating & Cooling [www.unitedenergy.ca](http://www.unitedenergy.ca)

West 416-503-3159 • Boilers • Ductless • Furnaces  
East 416-463-9708 • Central Air • Fireplaces  
Fax 416-503-2158 • Air Quality

3693 Lakeshore Blvd. West, Unit B Toronto, Ontario M8W 1P7

